


# STATIC TANKS FOR L.P.G

1,200 mm, 1,500 mm and 1,750 mm DIAMETER



All of the models in diameters of 1,200 mm, 1,500 mm and 1,750 mm can be installed above or underground.  
The only difference is the colour of the finition and if they have an inspection chamber or cover, depending on whether they are above or underground tanks.

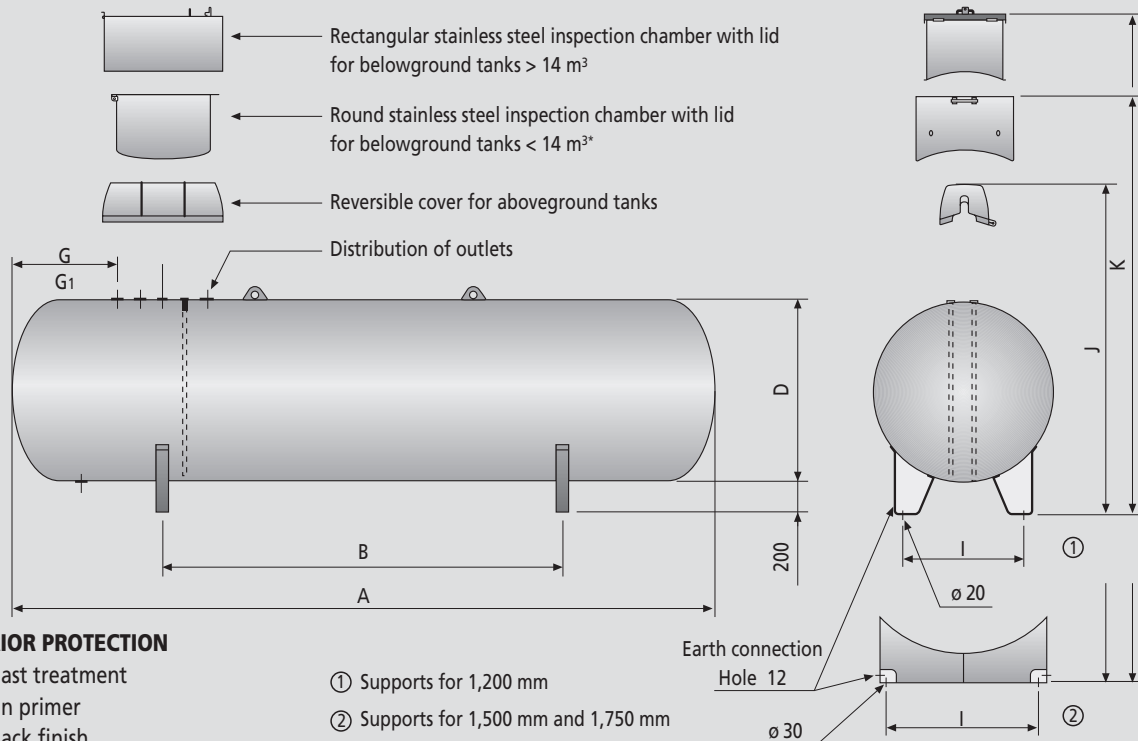

### TRIPLE EXTERIOR PROTECTION

- Automatic blast treatment
- Anti-corrosion primer
- White and black finish

- ① Supports for 1,200 mm
- ② Supports for 1,500 mm and 1,750 mm

\* Models LP 11E and LP 13E-17 have a rectangular inspection chamber

## Table of characteristics

Lapesa Model (Ref.)	Rated Capacity (litres)	Propane Stored (Kg.)	Total surface area (m <sup>2</sup> )	Approximate unloaded weight (Kg.)	Minimum safety valve discharge (m <sup>3</sup> /min. air)		DIMENSIONS IN MILLIMETRES							
					Aboveground	Underground	A	B	D	G	G <sub>1</sub>	I	J	K
LP 2450*	2.450	1.029	10,1	600	71,0	49,7	2.450	1.500	1.200	1.021	1.021	800	1.653	1.750
LP 2670*	2.670	1.121	10,9	650	75,6	52,9	2.660	1.500	1.200	1.006	1.006	800	1.653	1.750
LP 4000*	4.000	1.680	15,3	900	99,8	69,8	3.850	2.000	1.200	1.006	1.804	800	1.653	1.750
LP 4440*	4.440	1.865	16,8	990	107,7	75,4	4.240	2.300	1.200	1.006	1.906	800	1.653	1.750
LP 4660*	4.660	1.957	17,6	1.030	111,9	78,3	4.450	2.400	1.200	1.006	1.906	800	1.653	1.750
LP 4880*	4.880	2.050	18,4	1.080	116,1	81,2	4.660	2.500	1.200	1.006	2.006	800	1.653	1.750
LP 6430*	6.430	2.701	23,5	1.370	141,9	99,3	6.020	3.300	1.200	1.006	2.806	800	1.653	1.750
LP 6650*	6.650	2.793	24,3	1.420	145,8	102,1	6.250	3.400	1.200	1.006	3.006	800	1.653	1.750
LP 6870*	6.870	2.885	25,1	1.460	149,7	104,8	6.440	3.500	1.200	1.006	2.806	800	1.653	1.750
LP 7090*	7.090	2.978	25,9	1.510	153,6	107,5	6.650	3.600	1.200	1.006	3.006	800	1.653	1.750
LP 8334*	8.334	3.500	30,3	1.770	174,7	122,3	7.840	4.200	1.200	1.006	2.806	800	1.653	1.750
LP 4950*	4.950	2.079	16,1	1.250	104,0	72,8	3.140	1.500	1.500	1.091	1.091	1.000	1.956	2.050
LP 7000*	7.000	2.940	21,7	1.680	132,9	93,0	4.330	2.300	1.500	1.091	1.091	1.000	1.956	2.050
LP 10*	10.000	4.200	29,9	2.280	172,8	121,0	6.070	3.500	1.500	1.091	2.841	1.000	1.956	2.050
LP 13*	13.000	5.460	38,1	2.880	210,8	147,6	7.800	4.300	1.500	1.091	4.591	1.000	1.956	2.050
LP 16*	16.000	6.720	46,2	3.490	246,9	172,8	9.540	5.100	1.500	1.091	4.591	1.000	1.956	2.089
LP 19*	19.000	7.980	54,4	4.090	282,3	197,6	11.280	6.200	1.500	1.091	6.341	1.000	1.956	2.089
LP 22*	22.000	9.240	62,6	4.710	316,8	221,7	13.020	7.100	1.500	941	6.191	1.000	1.956	2.146
LP 11*	10.750	4.515	28,6	2.440	166,6	116,6	4.880	2.600	1.750	1.164	1.164	1.200	2.210	2.327
LP 13*-17	13.000	5.460	34	2.880	192,0	134,4	5.860	3.500	1.750	1.164	2.637	1.200	2.210	2.327
LP 15*	15.300	6.426	39,3	3.320	216,3	151,4	6.830	3.500	1.750	1.164	3.114	1.200	2.210	2.327
LP 20*	19.900	8.358	50	4.200	263,5	184,4	8.770	4.500	1.750	1.164	5.064	1.200	2.210	2.327
LP 24*	24.450	10.269	60,6	5.130	308,5	215,9	10.710	5.600	1.750	1.014	4.914	1.200	2.210	2.410
LP 29*	29.000	12.180	71,3	6.010	352,4	246,7	12.660	6.900	1.750	1.014	6.864	1.200	2.210	2.410
LP 34*	33.600	14.112	82	6.880	395,3	276,7	14.600	8.000	1.750	1.014	6.864	1.200	2.210	2.410
LP 38*	38.200	16.044	92,6	7.760	436,7	305,7	16.540	9.100	1.750	1.014	8.814	1.200	2.210	2.410

G dimensions for the option of «centred outlets».

\*=A, for aboveground tanks.

\*=E, for underground tanks.