HOT WATER PRODUCTION AND STORAGE TANKS
GEISER INERTIA - **STORAGE**

lapesa

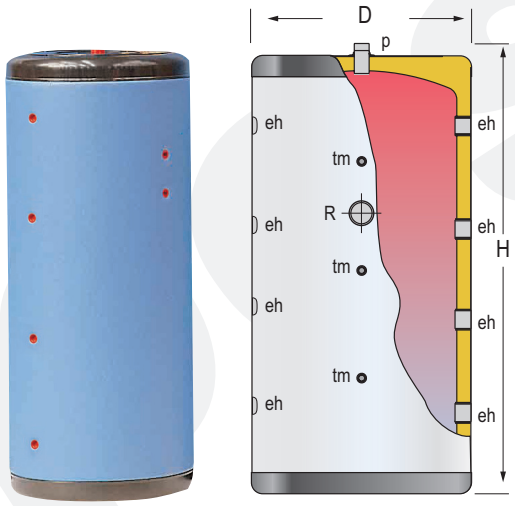

PRODUCT TECHNICAL SPECIFICATION
GEISER INERTIA – **GX4-500IF**

FCP_053_06_EN

DESCRIPTION:

Stainless steel **BUFFER TANK,** for closed heating and cooling circuits.
For vertical installation on floor. Manufactured in **STAINLESS STEEL AISI 304L.** Tank includes mould-injected rigid **PU thermal insulation** and external PVC lining with zip closure. Tank also includes one side threaded connection for an optional electrical heating element.

MAIN CHARACTERISTICS			
Total capacity:	Total	500	L
Maximum working pressure:		6	bar
Maximum working temperature:		110	ºC
Connections:	eh: side connection	1 ½	" F
	p: upper connection	1	" M
	tm: sensor connections	½	" F
	R: side connection for electric element	2	" F
Energy efficiency:	ErP Class	B	
	Static heat losses acc. to EN12897	95	W
External dimensions:	D: Diameter	770	mm
	H: Height (without connections)	1730	mm
	Diagonal (without connections)	1893	mm
Packaging dimensions:	Width / Height	820 / 1920	mm
Weight:	Without packaging / With packaging	79 / 90	kg

Lapesa Grupo Empresarial, S.L.
Pol. Industrial Malpica, Calle A, Parc. 1-A ⋆ ES-50016 ZARAGOZA (ESPAÑA)
Tel.: +34 976 465 180 / Fax: +34 976 574 393 ⋆ e-mail: lapesa@lapesa.es

ESPECIFICACIÓN TÉCNICA DE PRODUCTO EN GEISER INERCIA GX4-IF 0226-01