
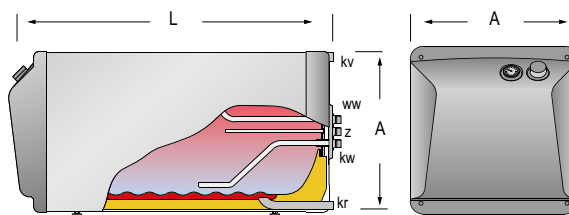


PRODUCT TECHNICAL SPECIFICATION
GEISER INOX – **GX6TS240**

FCP_02_02_EN



DESCRIPTION:

“**DOUBLE WALL**” tank for domestic hot water (DHW) **STORAGE-PRODUCTION**.

For horizontal installation. Manufactured in **STAINLESS STEEL AISI 316**, chemically pickled and passivated, with mould-injected rigid **PU thermal insulation** and external PVC lining with zip closure.

Includes sensor pocket on side connections plate; thermometer and regulation thermostat on front cover.

Prepared to withstand a boiler weighing up to 300 kg on top.

MAIN CHARACTERISTICS

Total capacity:	Total / DHW Tank	233 / 200	L
Maximum working pressure:	Primary / Secondary	3 / 8	bar
Maximum working temperature:	Primary / Secondary	110 / 90	°C
Exchange surface:	DHW tank wall	1.6	m ²
Connections:	kv: primary inlet	1	" F
	kr: primary outlet	1	" F
	ww: DHW outlet	¾	" M
	kw: cold water inlet / drain	¾	" M
	z: recirculation	¾	" M
Energy efficiency:	ErP Class	B	
	Static heat losses acc. to EN12897	57	W
External dimensions:	A: Height / width	630 / 630	mm
	L: Length (without connections)	1225	mm
Packaging dimensions:	Width / Height	720 / 760 / 1400	mm
Weight:	Without packaging / With packaging	75 / 86	kg