DHW PRODUCTION AND STORAGE TANKS
INDUSTRIAL CAPACITY - **STORAGE**

lapesa

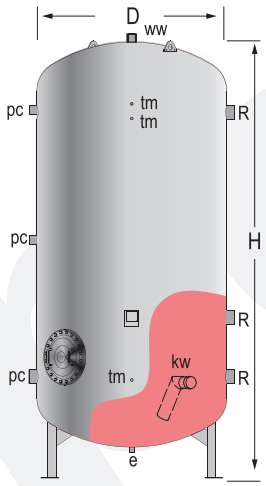

PRODUCT TECHNICAL SPECIFICATION
LARGE CAPACITIES – **MV10000RB**

FCP_041_03_EN-01

DESCRIPTION:

Tank for domestic hot water (DHW) **STORAGE.**
For vertical installation on floor. Manufactured in carbon steel with **EPOXY COATING, food grade**.
Cathodic protection based on magnesium anodes.
Equipped with DN400 side manhole for inspection / cleaning tasks, or optionally, for the installation of a stainless steel plate to allocate electric heating elements.
Optional: PVC lining along with 50 or 100 mm thick glass fibre thermal insulation, supplied in separate packaging.
Optional: ALUNOX lining along with 80 mm PU or 100 mm rock wool thermal insulation, supplied factory fitted.

MAIN CHARACTERISTICS			
Total capacity:	Total	10000	L
Maximum working pressure:		8	bar
Maximum working temperature:		75	ºC
Connections:	ww: DHW outlet	3	" M
	kw: cold water inlet	3	" M
	z: recirculation	2	" M
	e: drain	2	" M
	R: side connection for electric element	2	" M
	pc: "lapesa correx-up" connection	1 ½	" M
	tm: sensor connection	¾	" M
External dimensions:	D: Diameter	1750	mm
	H: Height (without connections)	4808	mm
	Diagonal (without connections)	5116	mm
Weight:	Without packaging	1205	kg

Lapesa Grupo Empresarial, S.L.
Pol. Industrial Malpica, Calle A, Parc. 1-A * ES-50016 ZARAGOZA (ESPAÑA)
Tel.: +34 976 465 180 / Fax: +34 976 574 393 * e-mail: lapesa@lapesa.es

ESPECIFICACIÓN TÉCNICA DE PRODUCTO EN MASTER-MV-RB-INDUSTRIAL-0322-01