


**LPUA\*\*V**

Stand-alone units with filling column (supply hose, "deadman" button and emergency pushbutton). Supplied with electrical installation. Ideal for in-house consumption, where no commercial transactions are carried out and the litres supplied do not need to be recorded. Due to their large dimensions, for transport purposes the skid is supplied loose, to be mounted to tank at destination, except for LPUA2450V and LPUA5000V models.

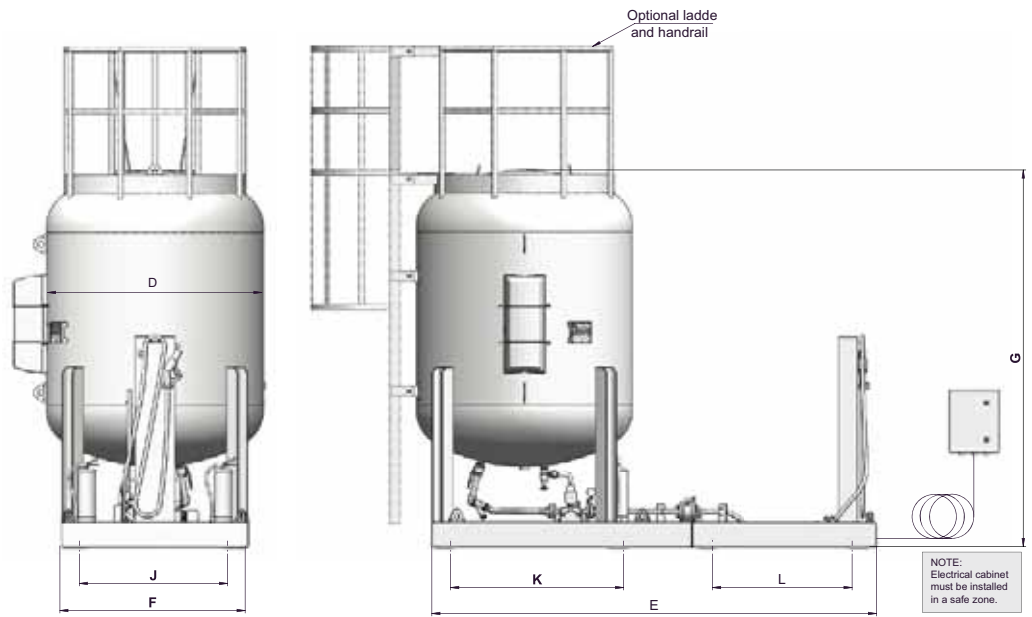


**CHARACTERISTICS TABLE**

| Model Ref. | weight. (Kg.) | Dimensions (mm) |       |       |       |       |       |       | Connection              | Size             | Thread |
|------------|---------------|-----------------|-------|-------|-------|-------|-------|-------|-------------------------|------------------|--------|
|            |               | D               | E     | F     | G     | J     | K     | L     |                         |                  |        |
| LPUA2450V  | 1.262         | 1.200           | 3.600 | 1.360 | 3.050 | 1.130 | 1.140 | --    | Filling                 | 1-1/4"           | NPT-H  |
| LPUA5000V  | 1.820         | 1.750           | 3.600 | 1.500 | 3.100 | 1.230 | 1.400 | --    | High point and diameter | 3/4"             | NPT-H  |
| LPUA6650V  | 2.368         | 1.750           | 5.300 | 1.500 | 3.840 | 1.230 | 1.400 | 2.875 | Drain                   | 1-1/4"           | NPT-H  |
| LPUA8400V  | 2.958         | 1.750           | 5.400 | 1.500 | 4.570 | 1.230 | 1.400 | 2.975 | Magnetic level          | Rochester Junior | --     |
| LPUA13V    | 4.188         | 1.750           | 5.760 | 1.500 | 6.510 | 1.230 | 1.400 | 3.335 | Safety                  | 1-1/4"           | NPT-H  |

**TANK CONNECTIONS**

**LPUAS\*\*V**

Stand-alone units with dispenser (incorporating litre and price totalizer and other items). Supplied with electrical installation. Due to their large dimensions, for transport purposes the skid is supplied loose, to be mounted to tank at destination, except for LPUAS2450V and LPUAS5000V models.

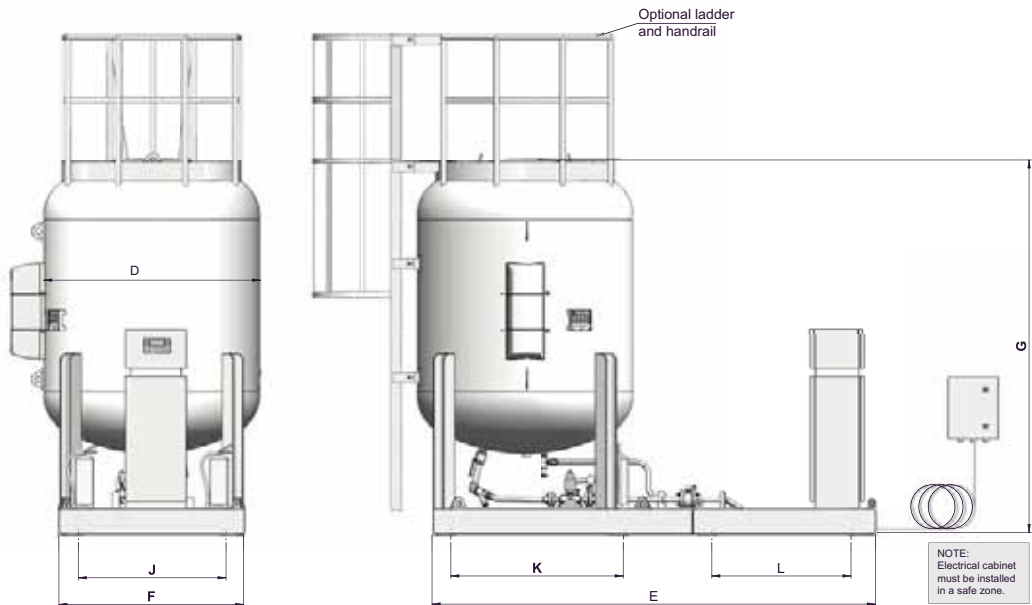


**CHARACTERISTICS TABLE**

| Model Ref. | weight. (Kg.) | Dimensions (mm) |       |       |       |       |       |       | Connection              | Size             | Thread |
|------------|---------------|-----------------|-------|-------|-------|-------|-------|-------|-------------------------|------------------|--------|
|            |               | D               | E     | F     | G     | J     | K     | L     |                         |                  |        |
| LPUAS2450V | 1.341         | 1.200           | 3.600 | 1.360 | 3.050 | 1.130 | 1.140 | --    | Filling                 | 1-1/4"           | NPT-H  |
| LPUAS5000V | 1.890         | 1.750           | 3.600 | 1.500 | 3.100 | 1.230 | 1.400 | --    | High point and diameter | 3/4"             | NPT-H  |
| LPUAS6650V | 2.447         | 1.750           | 5.300 | 1.500 | 3.840 | 1.230 | 1.400 | 2.875 | Drain                   | 1-1/4"           | NPT-H  |
| LPUAS8400V | 3.037         | 1.450           | 5.400 | 1.500 | 4.570 | 1.230 | 1.400 | 2.975 | Magnetic level          | Rochester Junior | --     |
| LPUAS13V   | 4.267         | 1.750           | 5.760 | 1.500 | 6.510 | 1.230 | 1.400 | 3.335 | Safety                  | 1-1/4"           | NPT-H  |

**TANK CONNECTIONS**

**LPUASP\*\*V**

Stand-alone units without filling column or dispenser.  
The filling column or dispenser must be installed at the required distance away from this unit.  
Supplied with electrical installation.

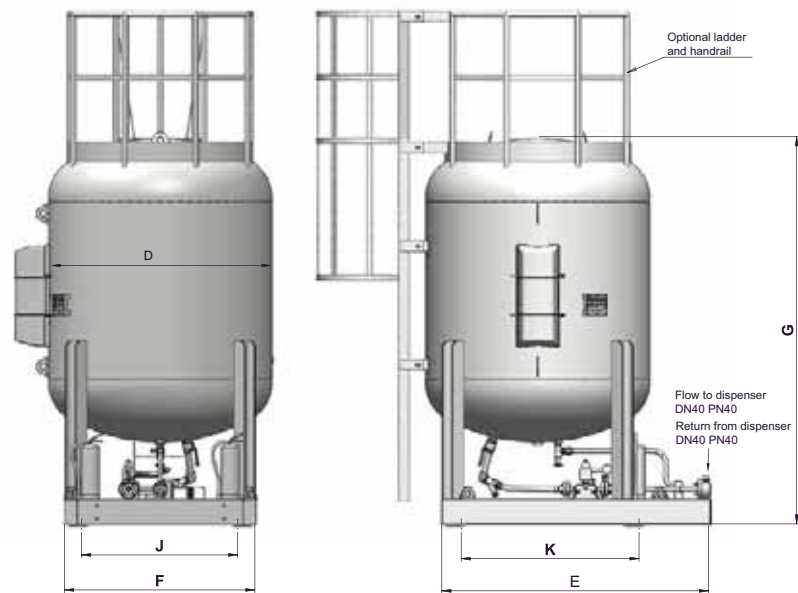

**CHARACTERISTICS TABLE**

| Model Ref.  | weight. (Kg.) | Dimensions (mm) |       |       |       |       |       |
|-------------|---------------|-----------------|-------|-------|-------|-------|-------|
|             |               | D               | E     | F     | G     | J     | K     |
| LPUASP2450V | 875           | 1.200           | 1.660 | 1.360 | 3.050 | 1.130 | 1.140 |
| LPUASP5000V | 1.680         | 1.750           | 2.230 | 1.500 | 3.100 | 1.230 | 1.400 |
| LPUASP6650V | 2.160         | 1.750           | 2.230 | 1.500 | 3.840 | 1.230 | 1.400 |
| LPUASP8400V | 2.750         | 1.750           | 2.230 | 1.500 | 4.570 | 1.230 | 1.400 |
| LPUASP13V   | 3.980         | 1.750           | 2.230 | 1.500 | 6.510 | 1.230 | 1.400 |

**TANK CONNECTIONS**

| Connection              | Size             | Thread |
|-------------------------|------------------|--------|
| Filling                 | 1-1/4"           | NPT-H  |
| High point and diameter | 3/4"             | NPT-H  |
| Drain                   | 1-1/4"           | NPT-H  |
| Magnetic level          | Rochester Junior | --     |
| Safety                  | 1-1/4"           | NPT-H  |

