


# STATIC TANKS FOR L.P.G.

**3,000 mm and 3,500 mm DIAMETER**



LARGE series models.

- The distribution of the elements can be varied according to customers' requirements.
- The type of surface finish must be specified by the client.
- If requested, we can supply the valve units, separately from the tank.

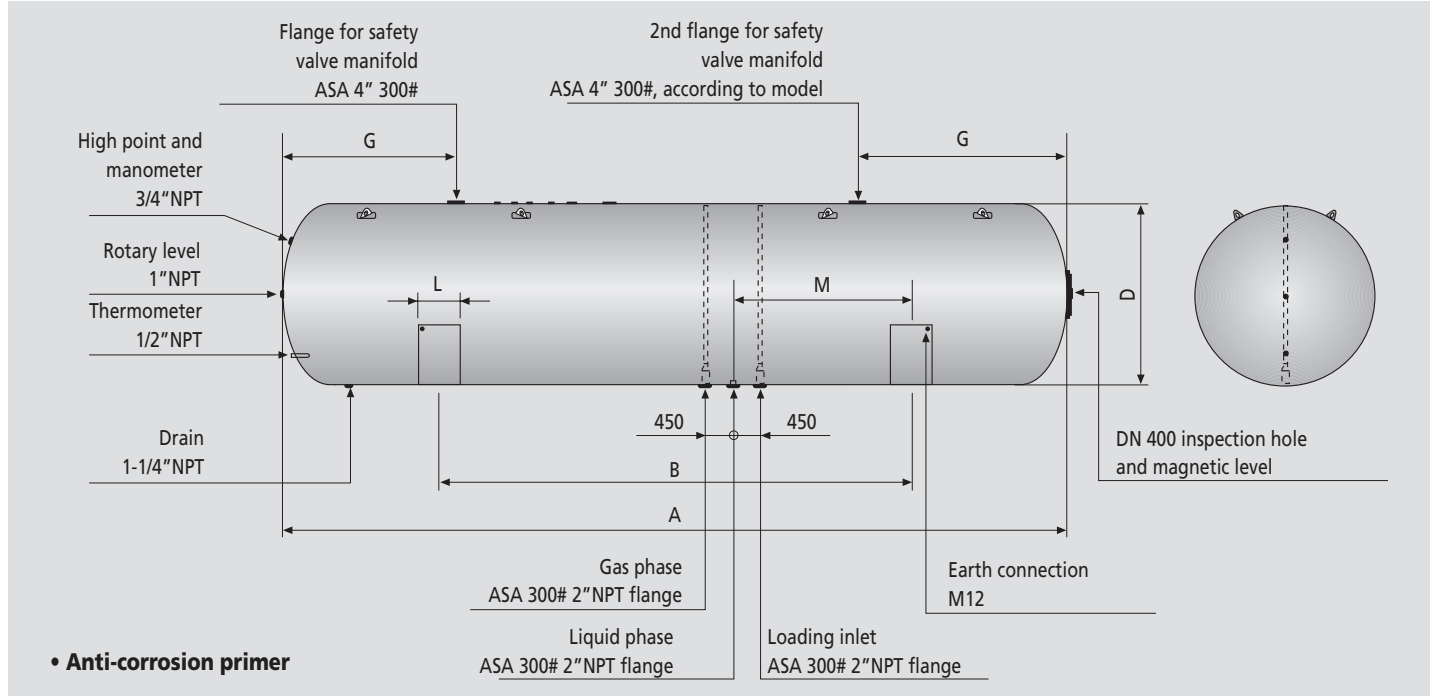

## Table of characteristics

Lapesa Model (Ref.)	Rated Capacity (litres)	Propane Stored (Kg.)	Total surface area (m <sup>2</sup> )	Approximate unloaded weight (Kg.)	Minimum safety valve discharge (m <sup>3</sup> /min. air)		DIMENSIONS IN MILLIMETRES					
					Aboveground	Underground	A	B	D	G	L	M
LP 50A-30	49.600	20.832	78,0	11.630	379,4	265,6	7720	4000	3.000	2.855	700	1.150
LP 70A-30	70.400	29.568	106,3	15.590	489,0	342,3	10.720	6000	3.000	2.855	700	3.150
LP 91A-30	91.100	38.262	134,5	19.550	593,1	415,2	13.720	8000	3.000	2.855	700	2.650
LP 112A-30	111.900	46.998	162,8	23.510	693,6	485,5	16.730	10.000	3.000	2.855	700	2.150
LP 133A-30	132.600	55.692	191,1	27.470	791,0	553,7	19.730	11.000	3.000	2.855	700	3.950
LP 153A-30	153.400	64.428	219,4	31.430	885,9	620,1	22.730	13.000	3.000	2.855	700	3.450
LP 174A-30	174.100	73.122	247,6	35.410	978,2	684,8	25.730	13.000	3.000	2.855	700	3.450
LP 98A-35	97.600	40.992	128,1	21.940	569,8	398,9	11.010	6.000	3.500	3.498	800	2.450
LP 126A-35	125.800	52.836	161,1	27.380	687,7	481,4	14.010	10.000	3.500	3.498	800	3.950
LP 154A-35	154.100	64.722	194,1	32.820	801,2	560,8	17.010	11.500	3.500	3.498	800	3.200
LP 182A-35	182.300	76.566	227,1	38.270	911,3	637,9	20.010	13.500	3.500	3.498	800	2.700
LP 211A-35	210.600	88.452	260,1	43.710	1.018,5	713,0	23.020	13.900	3.500	3.498	800	1.400
LP 239A-35	238.800	100.296	293,1	49.150	1.123,3	786,3	26.020	16.500	3.500	3.498	800	1.200

A: Aboveground