



DHW PRODUCTION AND STORAGE TANKS  
CORAL VITRO - **HIGH PERFORMANCE SINGLE COIL**

**lapesa**

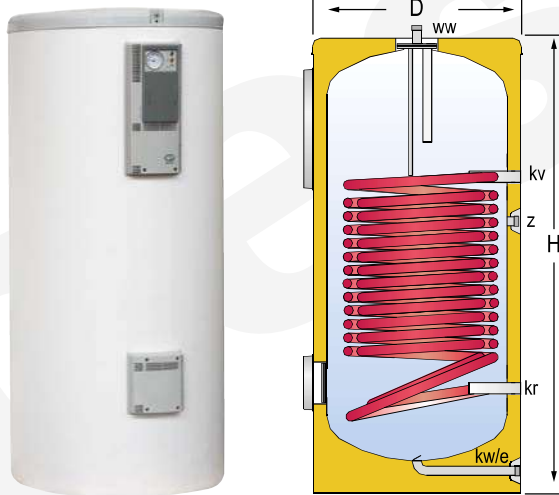

PRODUCT TECHNICAL SPECIFICATION  
CORAL VITRO – **CV200HL**

FCP\_034\_01\_EN



**DESCRIPTION:**

Tank for domestic hot water (DHW) **STORAGE-PRODUCTION.**

For vertical installation on floor. Manufactured in **VITREOUS ENAMELLED STEEL** according to the DIN4753 standard, with mould-injected rigid **PU THERMAL INSULATION** and external PVC lining with zip closure. Tank includes an internal **HIGH PERFORMANCE** enamelled steel **COIL** for thermal exchange. Cathodic protection based on magnesium anodes.

Equipped with side opening for inspection / cleaning tasks, or to allocate a backup electric heating element (optional).

Includes also a sensor pocket on upper connections plate and control panel type "T" (with thermometer).

**MAIN CHARACTERISTICS**

Total capacity:	Total	200	L
Maximum working pressure:	Primary / Secondary	25 / 8	bar
Maximum working temperature:	Primary / Secondary	200 / 90	°C
Exchange surface:	Coil	2.4	m <sup>2</sup>
Connections:	kv: primary inlet	1	" F
	kr: primary outlet	1	" F
	ww: DHW outlet	1	" M
	kw / e: cold water inlet / drain	1	" M
	z: recirculation	1	" M
Energy efficiency:	ErP Class	B	
	Static heat losses acc. to EN12897	56	W
External dimensions:	D: Diameter	620	mm
	H: Height (without connections)	1205	mm
	Diagonal (without connections)	1356	mm
Packaging dimensions:	Width / Height	680 / 1450	mm
Weight:	Without packaging / With packaging	97 / 105	kg

**Lapesa Grupo Empresarial, S.L.**

Pol. Industrial Malpica, Calle A, Parc. 1-A \* ES-50016 ZARAGOZA (ESPAÑA)

Tel.: +34 976 465 180 / Fax: +34 976 574 393 \* e-mail: lapesa@lapesa.es

