



DHW PRODUCTION AND STORAGE TANKS CORAL VITRO - **SINGLE COIL**

lapesa

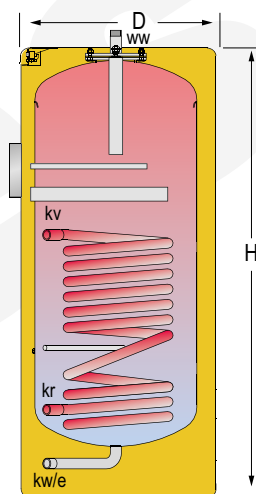

PRODUCT TECHNICAL SPECIFICATION CORAL VITRO – **CV150M1S**

FCP_032_03_EN



DESCRIPTION:

Tank for domestic hot water (DHW) **STORAGE-PRODUCTION**.

For vertical wall mounting or installation on floor. Manufactured in **VITREOUS ENAMELLED STEEL** according to the DIN4753 standard, with mould-injected rigid **PU THERMAL INSULATION** and external PVC lining with zip closure. Tank includes an internal enamelled steel **COIL** for thermal exchange.

Cathodic protection based on magnesium anodes.

Includes brackets for wall mounting, sensor pocket and sheath for backup ceramic electric heating element.

MAIN CHARACTERISTICS

Total capacity:	Total	150	L
Maximum working pressure:	Primary / Secondary	25 / 8	bar
Maximum working temperature:	Primary / Secondary	200 / 90	°C
Exchange surface:	Coil	0.6	m ²
Connections:	kv: primary inlet	½	" H
	kr: primary outlet	½	" H
	ww: DHW outlet	¾	" M
	kw / e: cold water inlet / drain	¾	" M
Energy efficiency:	ErP Class	B	
	Static heat losses acc. to EN12897	44	W
External dimensions:	D: Diameter	560	mm
	H: Height (without connections)	1265	mm
	Diagonal (without connections)	1384	mm
Packaging dimensions:	Width / Height	680 / 1450	mm
Weight:	Without packaging / With packaging	60 / 69	kg

Lapesa Grupo Empresarial, S.L.

Pol. Industrial Malpica, Calle A, Parc. 1-A * ES-50016 ZARAGOZA (ESPAÑA)

Tel.: +34 976 465 180 / Fax: +34 976 574 393 * e-mail: lapesa@lapesa.es

