



# HOT WATER PRODUCTION AND STORAGE TANKS GEISER INERTIA - **STRATIFICATION**

# lapesa

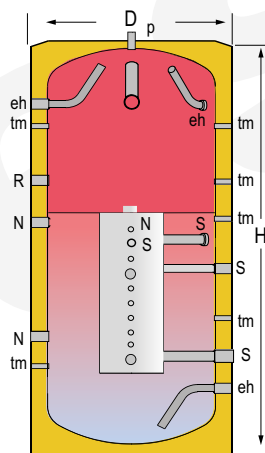

## PRODUCT TECHNICAL SPECIFICATION GEISER INERTIA – **G800L**

FCP\_051\_01\_EN-01



### DESCRIPTION:

Carbon steel **BUFFER TANK**, for heating or cooling circuits, with integrated **STRATIFICATION SYSTEM**. For vertical installation on floor. Tank includes mould-injected rigid **PU thermal insulation** and external PVC lining with zip closure. The removable insulation system allows the tank to access through 800 mm wide doors. Tank also includes one side threaded connection for an optional electrical heating element.

### MAIN CHARACTERISTICS

Total capacity:	Total	800	L
Maximum working pressure:		6	bar
Maximum working temperature:		110	°C
Connections:	eh: side connection	1 ½	" F
	N: side connection	1 ½	" F
	p: upper connection	1	" M
	S: conexión colectores	1 ½	" F
	tm: sensor connections	½	" F
	R: side connection for electric element	2	" F
Energy efficiency:	ErP Class	B	
	Static heat losses acc. to EN12897	87	W
External dimensions:	D: Diameter	950	mm
	H: Height (without connections)	1840	mm
	Diagonal (without connections)	2070	mm
Packaging dimensions:	Width / Height	1030 x 1000 / 2040	mm
Weight:	Without packaging / With packaging	169 / 194	kg

**Lapesa Grupo Empresarial, S.L.**

Pol. Industrial Malpica, Calle A, Parc. 1-A \* ES-50016 ZARAGOZA (ESPAÑA)  
Tel.: +34 976 465 180 / Fax: +34 976 574 393 \* e-mail: lapesa@lapesa.es

