
DHW PRODUCTION AND STORAGE TANKS MASTER VITRO - **SET OF COILS**

lapesa



PRODUCT TECHNICAL SPECIFICATION MASTER VITRO – **MVV2000SB**

FCP_042_02_EN

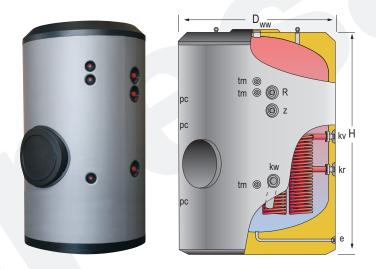

DESCRIPTION:

Tank for domestic hot water (DHW) **STORAGE-PRODUCTION.**

For vertical installation on floor. Manufactured in **VITREOUS ENAMELLED STEEL** according to the DIN4753 standard, with mould-injected rigid **PU THERMAL INSULATION**. As option, external PVC lining, to be supplied separately. Tank includes a set of detachable stainless steel coils for DHW production, by using an external energy source. Cathodic protection with Magnesium anodes. As option: permanent cathodic protection system "lapesa correx-up". Equipped with DN400 side manhole for inspection / cleaning tasks.

MAIN CHARACTERISTICS			
Total capacity:	Total	2000	L
Maximum working pressure:	Primary / Secondary	25 / 8	bar
Maximum working temperature:	Primary / Secondary	200 / 90	°C
Exchange surface:	Set of COILS	3.4	m ²
Connections:	kv: primary inlet	2	" N
	kr: primary outlet	2	" N
	ww: DHW outlet	2	" N
	kw: cold water inlet	2	" N
	z: recirculation	1 1/2	" N
	e: drain	1 1/2	" N
	R: side connection for electric element	2	" N
	pc: "lapesa correx-up" connection	1 1/2	" N
	tm: sensor connection	3/4	" N
Energy efficiency:	ErP Class	С	
	Static heat losses acc. to EN12897	174	W
External dimensions:	D: Diameter	1360	mm
	H: Height (without connections)	2280	mm
	Diagonal (without connections)	2655	mm
Packaging dimensions:	Width / Height	1360 x 2320	mm
Weight:	Without packaging / With packaging	495 / 495.5	kg

